




CECI 120

IN-GROUND



Drive-over in-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Insulation class II, Protection rating IP67.



Apparecchio per incasso a terra carrabile e senza viti a vista, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



2F1.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





CECI 120 - COMPONENTS

IP67




COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Round or square design, 2 or 3 light versions available for a diffuse or directed light emission.

***COVER** senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nelle versioni quadrata o ad anello, a 2 aperture e a 3 aperture per permettere un'emissione della luce diffusa o direzionata.*

DIFFUSER made of high impact and high-pressure load resistant resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.

***DIFFUSORE** in resina antiurto altamente resistente al carico (PC), completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

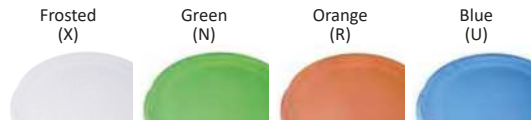

HOUSING made of shockproof resin material, provided with double holes and double watertight cable glands for safe connecting cable.

***CASSA** realizzata in resina antiurto, provvista di doppi fori e doppio pressacavo a tenuta stagna, per consentire in maniera sicura l'ingresso e l'uscita delle connessioni elettriche.*

INSTALLATION HOUSING made of shockproof resin material to be fixed into the ground before installing the luminaries.

***CONTRO-CASSA** in resina antiurto da fissare al suolo prima dell'installazione degli apparecchi.*

CECI 120



Dimensions and weight
Installation housing depth: 93 mm
Diameter: Ø 120 mm
Weight: 0,45 Kg

Cover colours:



Diffuser PC:



LED LAMPS




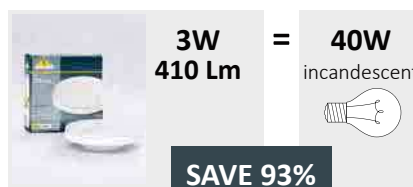
Comply with: EU2019/2015
EU2019/2020
Technical details on page 596.

GX53 LED

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
 GX53 LED	3 W	410 lm	6500 K 4000 K 3000 K	.G1K



3W 410 Lm = 40W incandescent
SAVE 93%

In-ground supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

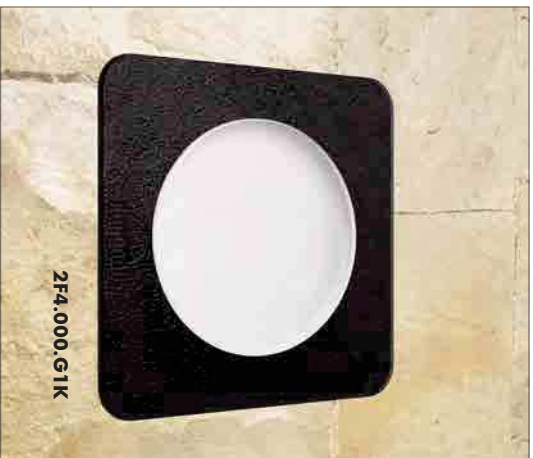

CECI 120


IN-GROUND



CECI 120 2F1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

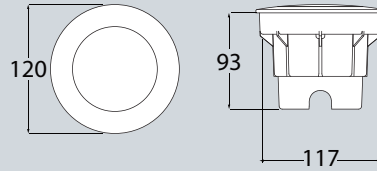


Pcs 36
Kg 15,7
mc 0,084

CECI 120-3L 2F3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

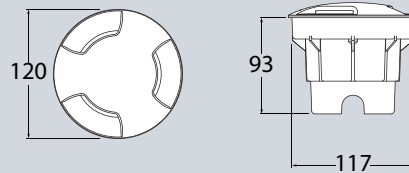


Pcs 36
Kg 15,7
mc 0,084

CECI 120-2L 2F2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

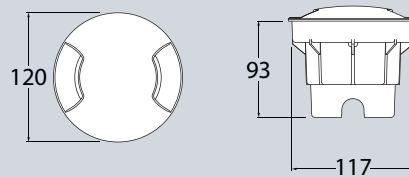


Pcs 36
Kg 15,7
mc 0,084

CECI 120-SQ 2F4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

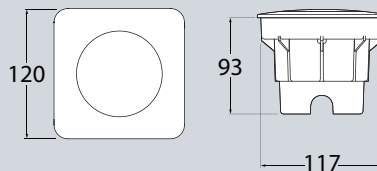

Pcs 36
Kg 15,7
mc 0,084