


LED STRIP LIGHT

NRP-ST24C-64-14 Series
IP65





Model No	Power	lm/w	Output (lm)	Cutting	Roll/m	LED QTY	IP	CCT
NRP-ST24C-64-14 WW	14W/M	100lm/w	1400lm/m	42mm	5m	168Pcs/m	IP65	3000K
NRP-ST24C-64-14 DW	14W/M	100lm/w	1400lm/m	42mm	5m	168Pcs/m	IP65	4000K

LED STRIP LIGHT ACCESSORIES

Picture	Model No	Rated Power	Input Voltage	Rated Current	Material	Color	Size in mm	kg
	NRP-ST24-IP65-168-ONE-CONNECT	72W	DC24V	3A	Pvc+Copper	White	197*18*10	0.095
	NRP-ST24-IP65-168-CAP				Silica gel	Transparent	10*14*6	0.001
	NRP-ST24-IP65-168-JOIN				Pc	Transparent	48*17*8	0.03
	NRP-ST24-IP65-168-BRACKET				Silica gel	Transparent	6*27*6	0.001
	NRP-ST24-IP65-168-PVC				Pvc	Transparent	1200*15*7	0.29

Dimensions in mm

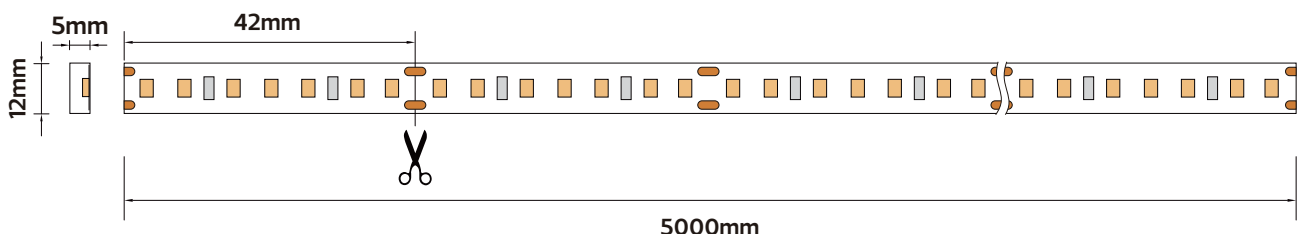

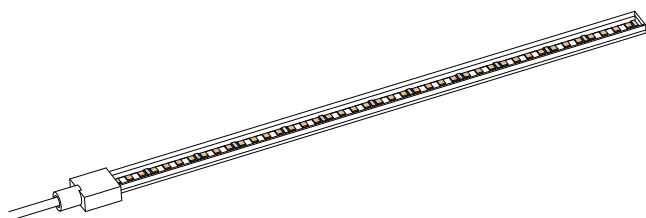


Description:
LED STRIP LIGHT


Main material:
Silicone+ Copper

Specification:
Silicone lamp belt, the light is soft not
dazzling, gorgeous and glamorous.
IP65


Applications
.Signboard
.The ceiling
.Building external wall

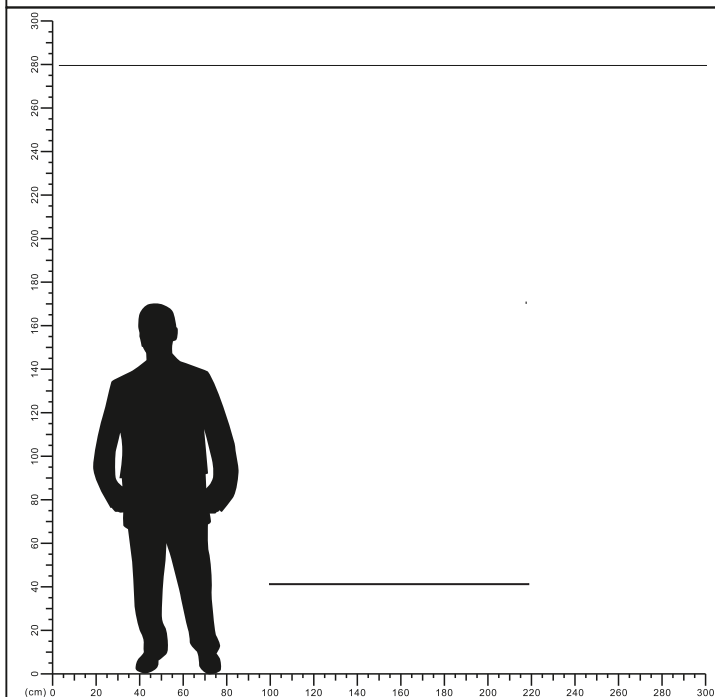

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

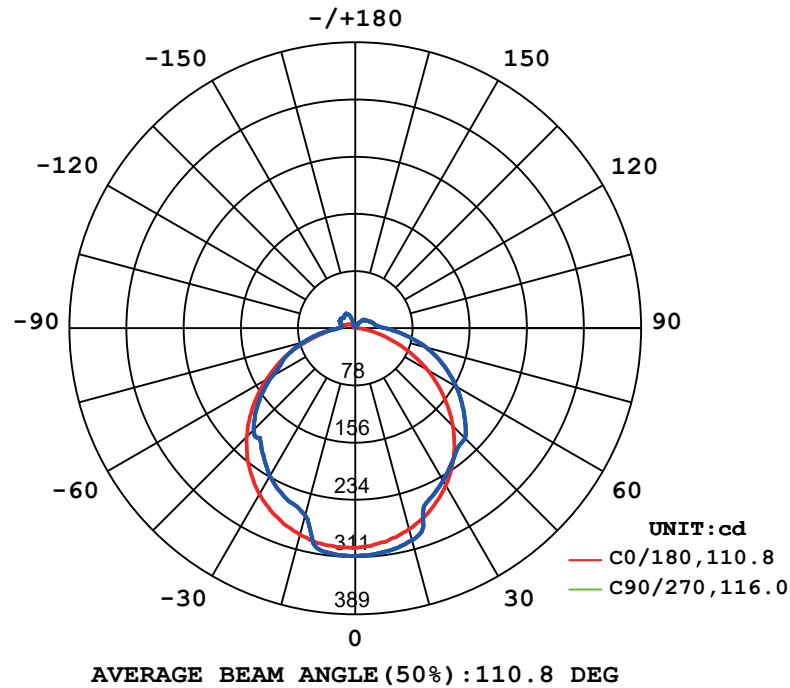

Illuminance at a Distance

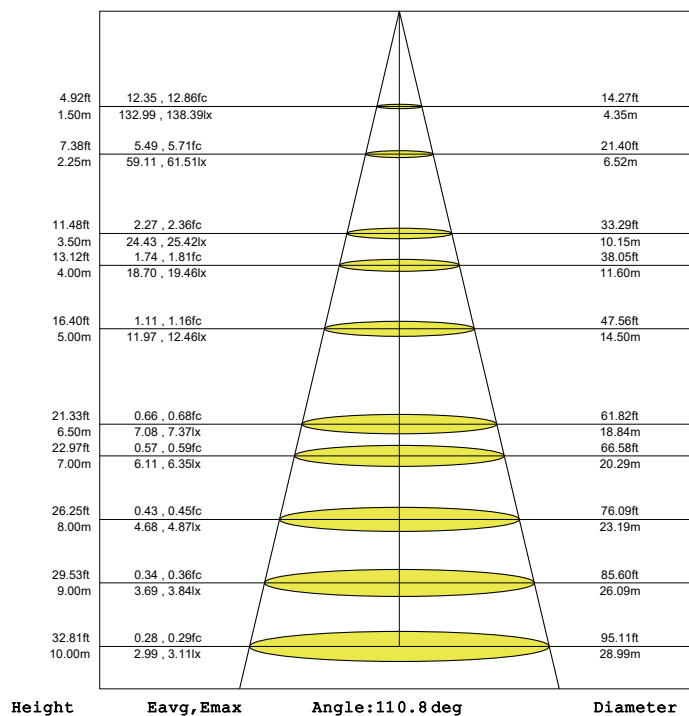


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LED Strip Power Supply

Model No	Input Voltage(AC)	Input Current(A)	Output Voltage(DC)	Output Current(A)	IP	Watt
NR-PS-60W	100-240V	1A	24V	2.5A	20	60
NR-PS-100W	100-240V	1.11A	24V	4.2A	20	100
NR-PS-150W	220-240V	1.2A	24V	6.25A	20	150
NR-PS-360W	100-240V	6A	24V	15A	20	360
NR-PS102-24V-60W	100-240V	1A	24V	2.5A	20	60
NR-PS102-24V-150W	100-240V	2.5A	24V	6.3A	20	150
NR-PS102-24V-60-IP65	100-240V	1A	24V	2.5A	65	60



NOTE:the power supply should not exceed 80% of the rated power for long periods of time!



NR-PS-60W




NR-PS-100W



NR-PS-150W



NR-PS-360W



NR-PS102-24V-60W













NR-PS102-24V-150W




NR-PS102-24V-60-IP65


Recommended spare parts

Aluminium Profile


Picture	Model No	Cross section size in mm	Match LED strip lights size
	PXG-1201H		Max 12mm
	NR-XT-235		Max 26.7mm
	PXG-3535		Max 25mm
	PXG-3535-A		Max 27mm
	PXG-2626		Max 24.4mm
	PXG-7676		Max 70mm
	NR-7676-L		Max 70mm

LED Strip Solution

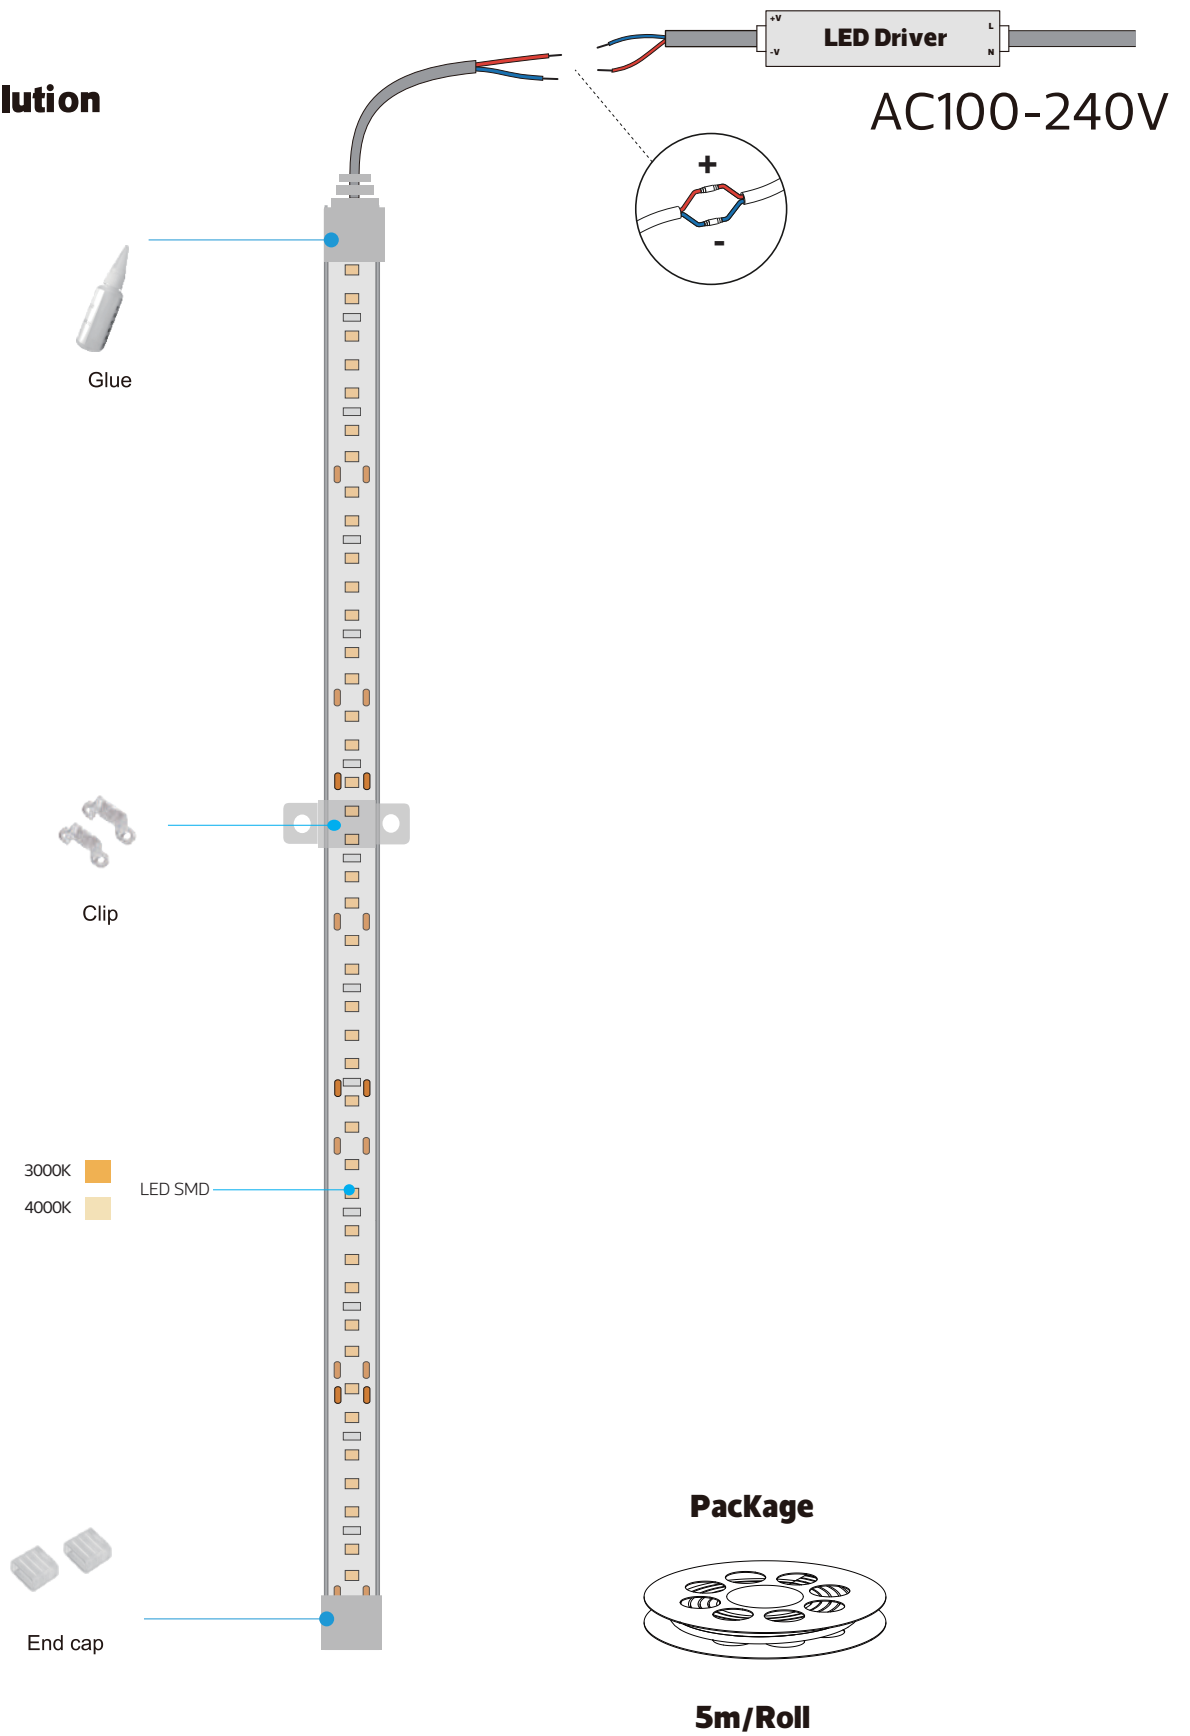

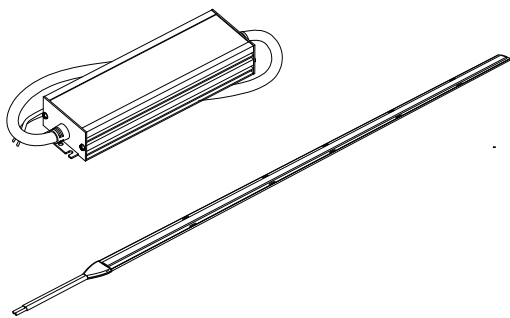


1

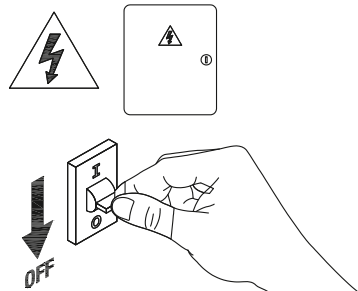


Turn off power

2

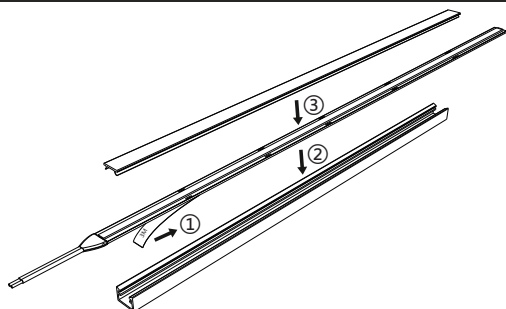


Align the 3M adhesive tape on the back of the strip to the mounting position and press the strip slowly and evenly to ensure that the tape is fully adhered to the surface.

3




Fixing aluminum profiles to the ceiling.

4

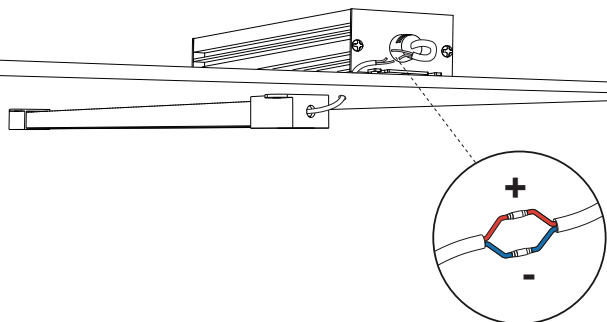


Connect DC24V cable.

5



Installation is completed.

6



Turn on power

7

